


# Glissière moteur à plateau à base coulissante



- MATIÈRE**  
- Acier C32.  
- Fixation : acier zingué.

Produits associés

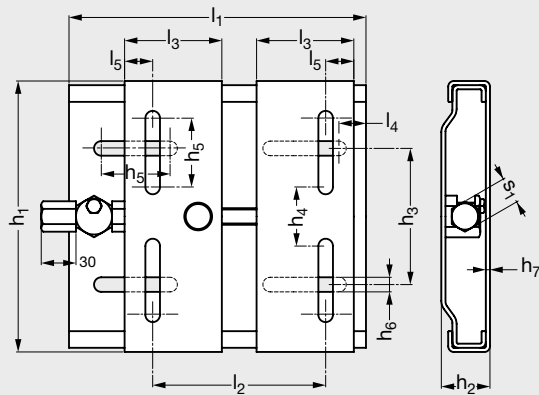

LS-LSES Page 681



SK Page 702

Référence

Exemple de commande

**F6-13-210**

**Zone de réglage**

	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	l <sub>6</sub> Type du moteur							h <sub>1</sub>	h <sub>2</sub>	h <sub>3</sub>	h <sub>4</sub>	h <sub>5</sub>	h <sub>6</sub>	h <sub>7</sub>	s <sub>1</sub>	Poids (kg)	Vis fixation moteur	
						63	71	80	90	100	112	132											160
						F6-13-210	210	100	70	25	20	70											58
F6-13-210	210	100	70	25	20	-	-	45	-	-	-	-	-	195	33	98	43	50	10,5	3	19	2,2	M8
F6-13-270	270	100	70	25	20	130	118	-	-	-	-	-	-	195	33	98	43	50	10,5	3	19	2,7	M6
F6-13-270	270	100	70	25	20	-	-	105	90	-	-	-	-	195	33	98	43	50	10,5	3	19	2,7	M8
F6-13-270	270	100	70	25	20	-	-	-	-	70	40	-	-	195	33	98	43	50	10,5	3	19	2,7	M10
F6-13-430	430	140	95	30	27	-	-	-	236	-	-	-	-	290	40	165	90	62,5	12,5	4	22	7,4	M8
F6-13-430	430	140	95	30	27	-	-	-	-	216	186	160	-	290	40	165	90	62,5	12,5	4	22	7,4	M10
F6-13-430	430	140	95	30	27	-	-	-	-	-	-	-	122	290	40	165	90	62,5	12,5	4	22	7,4	M12