


Nourrice à raccordement instantané

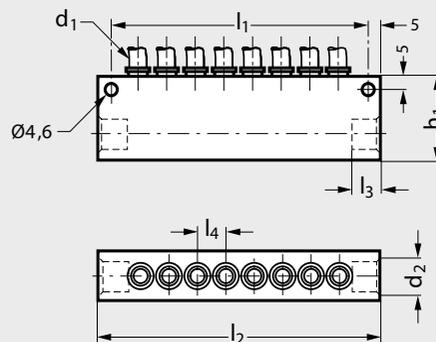

■ **MATIÈRE**

- Aluminium anodisé.

■ **UTILISATION**

- Pression maxi : 20 bars.
- Température d'utilisation :
-10°C à +80°C.

Référence

■ Exemple de commande **H320-4-1/4-8**

	d ₁	d ₂	l ₁	l ₂	l ₃	l ₄	h ₁	Nb de sorties
H320-4-1/4-8	4	1/4"	104	114	10	11,5	33	8
H320-6-1/4-8	6	1/4"	104	114	10	12,5	33	8
H320-8-3/8-6	8	3/8"	104	114	12	15	33	6
H320-10-1/2-6	10	1/2"	135,5	145,5	16	17,1	48	6
H320-12-1/2-6	12	1/2"	148	158	16	20,5	45	6