


Raccord piquage droit mâle cylindrique laiton nickelé

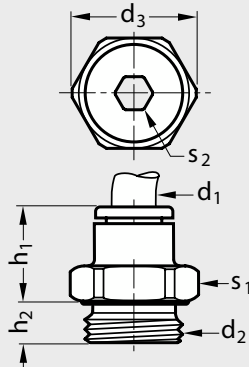

■ **MATIÈRE**

- Corps : **laiton** nickelé.
- Joints : nitrile.
- Rondelle d'accrochage : acier **inox**.

Référence

■ Exemple de commande **H30-D-3-M3-CY**

	d ₁	d ₂	d ₃	h ₁	h ₂	s ₁	s ₂
H30-D-3-M3-CY	3	M3x0,5	-	12,5	2,5	8	-
H30-D-3-M5-CY	3	M5x0,8	8,5	12,5	3,5	8	2,5
H30-D-4-M3-CY	4	M3x0,5	-	14,5	2,5	8	-
H30-D-4-M7-CY	4	M7x1	11	14	5	10	2,5
H30-D-4-1/8-CY	4	1/8"	14	11,5	5	13	3
H30-D-4-1/4-CY	4	1/4"	17,5	10,5	5,5	16	3
H30-D-4-M5-CY	4	M5x0,8	8,5	14	3	8	2,5
H30-D-6-3/8-CY	6	3/8"	22	13	5,5	20	4
H30-D-6-M7-CY	6	M7x1	11	16	5	10	3
H30-D-6-M10-CY	6	M10x1	14	13	5	13	4
H30-D-6-M12-CY	6	M12x1,5	16	13	5,5	15	4
H30-D-6-1/8-CY	6	1/8"	14	13	5	13	4
H30-D-6-1/4-CY	6	4/1/2009	17,5	12,5	5,5	16	4
H30-D-6-M5-CY	6	M5x0,8	11	16	3	10	2,5
H30-D-6-1/2-CY	6	1/2"	26	20	7,5	24	4

	d ₁	d ₂	d ₃	h ₁	h ₂	s ₁	s ₂
H30-D-8-1/8-CY	8	1/8"	14	20,5	4,5	13	5
H30-D-8-1/4-CY	8	1/4"	17,5	19,5	5,5	16	6
H30-D-8-3/8-CY	8	3/8"	22	18	5,5	20	6
H30-D-8-1/2-CY	8	1/2"	26	16,5	7,5	24	6
H30-D-8-M10-CY	8	M10x1	14	21	5	13	5
H30-D-8-M12-CY	8	M12x1,5	16	21	5,5	15	5
H30-D-10-1/4-CY	10	1/4"	17,5	23	5,5	16	7
H30-D-10-3/8-CY	10	3/8"	22	19,5	5,5	20	8
H30-D-10-1/2-CY	10	1/2"	26	18,5	7,5	24	8
H30-D-12-1/4-CY	12	1/4"	21	27,5	5,5	19	7
H30-D-12-3/8-CY	12	3/8"	22	27	5,5	20	9
H30-D-12-1/2-CY	12	1/2"	26	22,5	7	24	10
H30-D-14-3/8-CY	14	3/8"	24	29,5	5,5	22	9
H30-D-14-1/2-CY	14	1/2"	26	28	7	24	10